

FIBERGLASS BASIN SPEC SHEET

FIBERGLASS BASIN SHORT SPECIFICATION


ANTI-FLOATATION FLANGE

SPECIFY:

NONE

FIBERGLASS (ROUND)

FIBERGLASS ENCAPSULATED
ASTM A-36 STEEL (SQUARE)

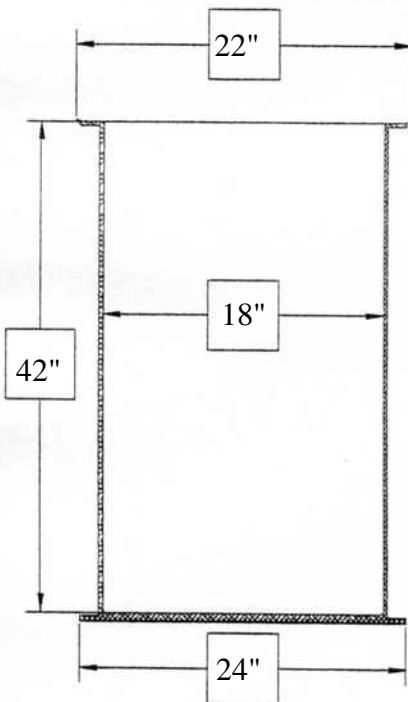

The resins used shall be a commercial grade polyester and shall be evaluated as a laminate by test or determined by previous service to be acceptable for the intended environment.

The reinforcing material shall be a commercial grade of glass fiber (continuous strand, chopped-strand, continuous mat and/or noncontinuous mat) having a coupling agent which will provide a suitable bond between the glass reinforcement material and resin.

The FRP laminate wall thickness shall vary with the wet well height to provide the aggregate strength necessary to meet the tensile and flexural physical properties requirements. The wet well FRP wall laminate must be designed to withstand wall collapse or buckling based on a hydrostatic pressure of 62.4 lbs. per sq. ft.; a saturated soil weight of 120 lbs. per cu. ft.; a soil modulus of 700 pounds per sq. ft.; and, the pipe stiffness values as specified in ASTM D3753. The wet well FRP laminate must be constructed to withstand or exceed two times the assumed loading on any depth of the wet well.

The finished FRP laminate will have a Barcol hardness of at least 90% of the resin manufacturer's specified hardness for the fully cured resin. The Barcol hardness shall be the same for both interior and exterior surfaces.

The wet well top flange shall have an outside diameter at least 4.0 inches greater than the inside diameter of the wet well. A four or six hole pattern shall accommodate the mounting of a cover with at least 0.25 inches in diameter 300 series stainless steel fasteners. Noncorroding stainless steel threaded inserts shall be fully encapsulated with noncontinuous mat or chopped-strand glass fiber reinforcement. The inserts shall have an offset tab to prevent stripping or spinning out when removing and reinserting cover fasteners.

INDUSTRIES
TOPP
INCORPORATED

BASIN SPEC. SHEET

Reference: -

Highway 25 North P.O. Box 420
Rochester, IN 46875
Phone: 800/354-4594 Fax: 774/223-6106

Scale: None

Drawn By: RM

App'd By:

Date: 06/26/03

Supersedes Prints
Prior To: 06/26/03

This sheet is and contains confidential proprietary information owned exclusively by TOPP INDUSTRIES, INC. It is furnished on a strictly confidential basis. The recipient agrees, but is not limited to the condition that the user will not use the same or a result or its identity or issues outside of the information contained here and will be held responsible or liable the manufacturer of the same should the user provide any other source than TOPP INDUSTRIES, INC.

Reference No: 10090

Revisions

1 First Released 06/27/03